



# VACUUM SEALER SU-806LL

Floorstanding unit. 63 m<sup>3</sup>/h. 848+848 mm.



## SALES DESCRIPTION

Two sealing bars (848+848 mm)  
63 m<sup>3</sup>/h Busch vacuum pump.  
Vacuum controlled by sensor.

- ✓ Powered by Busch.
- ✓ Vacuum controlled by sensor.
- ✓ Vacuum PLUS.
- ✓ LCD colour screen: all information at a glance.
- ✓ Backlit touch keyboard.
- ✓ Programmable: 25-programme memory. Blocking option.
- ✓ "Pause" button.
- ✓ Phased vacuum programme.
- ✓ Detection of the evaporation of liquids.
- ✓ Double seal.
- ✓ Cordless sealing bar.
- ✓ Progressive decompression.
- ✓ Vac-Norm ready with Automatic decompression.
- ✓ Stainless steel body and chamber.
- ✓ Damped transparent lid of high durability polycarbonate.
- ✓ Dry-oil programme for drying the pump.
- ✓ Working hours counter for oil changes.
- ✓ Safety system with protection against vacuum failure.
- ✓ NSF-listed.

## INCLUDES

- ✓ BUSCH pump.
- ✓ Sensor Controls.
- ✓ 25 programmable settings.
- ✓ Vacuum PLUS: up to 10 seconds of extra vacuum pull.
- ✓ Soft air function.
- ✓ Clear methacrylate lid.
- ✓ "PAUSE" function.
- ✓ Liquid detection system.
- ✓ Dry oil cycle.
- ✓ NSF Approved.
- ✓ Filling plate.

## OPTIONAL

- Inert gas
- Printer
- Bluetooth connectivity
- Vacuum packing bags
- External vacuum kit for
- Vac-Norm, containers and accessories
- Bag cutting kit
- Support for liquid packaging
- Additional filling plates

## ACCESSORIES

- Bag cutting kits
- Filling plates
- Liquid insert plates
- Vac-norm external vacuum kits
- Vac-norm containers
- Smooth bags for vacuum
- packing
- Thermal labels for CG2 / RB printer
- RB Desktop printer for SU vacuum packing machines
- Thermal transfer labels for RB printer

## SPECIFICATIONS

Pump capacity: 63 m<sup>3</sup>/h  
Pump capacity (60 Hz): 75 m<sup>3</sup>/h  
Bar length: 848 mm + 848 mm  
Total loading: 1500 W  
Vacuum pressure (maximum): 0.5 mbar

Plug: --  
Electrical connection: --

### Internal dimensions

- ✓ Width: 864 mm
- ✓ Depth: 603 mm
- ✓ Height: 215 mm

### External dimensions (WxDxH)

- ✓ Width: 960 mm
- ✓ Depth: 757 mm
- ✓ Height: 998 mm

Net weight: 232 Kg

Noise level (1m.): 75 dB(A)  
Background noise: 32 dB(A)

### Crated dimensions

840 x 1060 x 1200 mm  
Gross weight: 257 Kg

FOOD PRESERVATION AND SOUS-VIDE  
VACUUM PACKING MACHINES - "SENSOR ULTRA" LINE

product sheet  
updated 04/03/2022



SAMMIC, S.L.  
Bassaré, 1 - 20720 Azzovita  
www.sammic.com



# VACUUM SEALER SU-806LL


Floorstanding unit. 63 m<sup>3</sup>/h. 848+848 mm.



## AVAILABLE MODELS

- 1140893 Vacuum packing machine SU-806 LL 230-400/50/3N
- 1140894 Vacuum packing machine SU-806 LL 230-400/50/3N -C-
- 1140895 Vacuum packing machine SU-806G LL 230-400/50/3N
- 1140896 Vacuum packing machine SU-806P LL 230-400/50/3N
- 1140897 Vacuum packing machine SU-806GP LL 230-400/50/3N
- 1140911 Vacuum packing machine SU-806 LL 208-240/60/3
- 1140912 Vacuum packing machine SU-806 LL 208-240/60/3 -C-
- 1140913 Vacuum packing machine SU-806G LL 208-240/60/3
- 1140914 Vacuum packing machine SU-806P LL 208-240/60/3
- 1140915 Vacuum packing machine SU-806GP LL 208-240/60/3
- 1140929 Vacuum packing machine SU-806 LL 220/60/3
- 1140930 Vacuum packing machine SU-806 LL 220/60/3 -C-
- 1140931 Vacuum packing machine SU-806G LL 220/60/3
- 1140932 Vacuum packing machine SU-806P LL 220/60/3
- 1140933 Vacuum packing machine SU-806GP LL 220/60/3
- 1140898 Vacuum packing machine SU-806GP LL 230/50/1

\* Ask for special versions availability

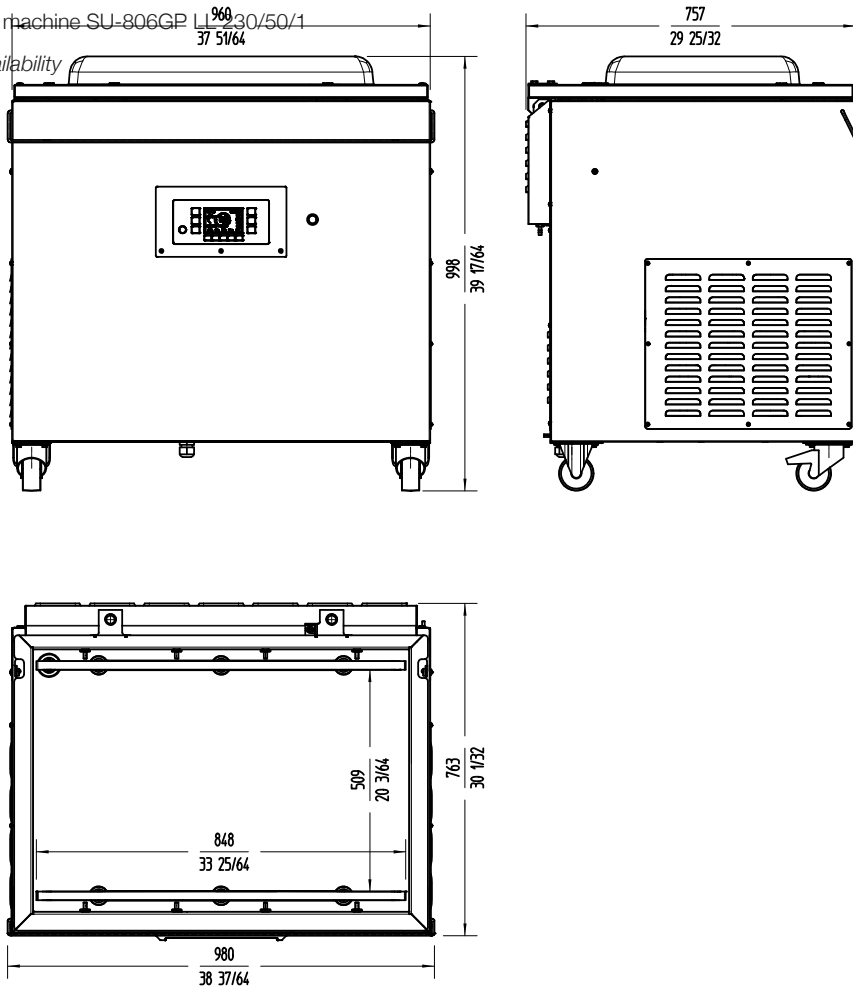

FOOD PRESERVATION AND SOUS-VIDE  
VACUUM PACKING MACHINES - "SENSOR ULTRA" LINE

**sammic** | www.sammic.com  
Food Service Equipment Manufacturer

Polígono Basarte, 1. phone +34 943 15 72 36  
20720 Azkoitia, Spain sales@sammic.com



Project	Date
Item	Qty
Approved	

product sheet  
updated 04/03/2022