



VACUUM SEALER SU-606

Floorstanding unit. 63 m³/h. 413+656 mm.



SALES DESCRIPTION

Two sealing bars (413+656 mm.)
63 m³/h Busch vacuum pump.
Vacuum controlled by sensor.

- ✓ Powered by Busch.
- ✓ Vacuum controlled by sensor.
- ✓ Vacuum PLUS.
- ✓ LCD colour screen: all information at a glance.
- ✓ Backlit touch keyboard.
- ✓ Programmable: 25-programme memory. Blocking option.
- ✓ "Pause" button.
- ✓ Phased vacuum programme.
- ✓ Detection of the evaporation of liquids.
- ✓ Double seal.
- ✓ Cordless sealing bar.
- ✓ Progressive decompression.
- ✓ Vac-Norm ready with Automatic decompression.
- ✓ Stainless steel body and chamber.
- ✓ Damped transparent lid of high durability polycarbonate.
- ✓ Dry-oil programme for drying the pump.
- ✓ Working hours counter for oil changes.
- ✓ Safety system with protection against vacuum failure.
- ✓ NSF-listed.

INCLUDES

- ✓ BUSCH pump.
- ✓ Sensor Controls.
- ✓ 25 programmable settings.
- ✓ Vacuum PLUS: up to 10 seconds of extra vacuum pull.
- ✓ Soft air function.
- ✓ Clear methacrylate lid.
- ✓ "PAUSE" function.
- ✓ Liquid detection system.
- ✓ Dry oil cycle.
- ✓ NSF Approved.
- ✓ Filling plate.

OPTIONAL

- Inert gas
- Sealing plus
- Printer
- Bluetooth connectivity
- Vacuum packing bags
- External vacuum kit for Vac-Norm, containers and accessories
- Bag cutting kit
- Support for liquid packaging
- Additional filling plates

ACCESSORIES

- Bag cutting kits
- Filling plates
- Liquid insert plates
- Vac-norm external vacuum kits
- Vac-norm containers
- Smooth bags for vacuum packing
- Thermal labels for CG2 / RB printer
- RB Desktop printer for SU vacuum packing machines
- Thermal transfer labels for RB printer

SPECIFICATIONS

Pump capacity: 63 m³/h
Pump capacity (60 Hz): 75 m³/h
Bar length: 413 mm + 656 mm
Total loading: 1500 W
Vacuum pressure (maximum): 0.5 mbar

Plug: --
Electrical connection: --

Internal dimensions

- ✓ Width: 672 mm
- ✓ Depth: 481 mm
- ✓ Height: 200 mm

External dimensions (WxDxH)

- ✓ Width: 740 mm
- ✓ Depth: 566 mm
- ✓ Height: 997 mm

Net weight: 159 Kg

Noise level (1m.): 75 dB(A)
Background noise: 32 dB(A)

Crated dimensions

670 x 830 x 1200 mm
Gross weight: 189 Kg





VACUUM SEALER SU-606


Floorstanding unit. 63 m³/h. 413+656 mm.



AVAILABLE MODELS

- 1140835 Vacuum packing machine SU-606 230-400/50/3N
- 1140836 Vacuum packing machine SU-606 230-400/50/3N -C-
- 1140837 Vacuum packing machine SU-606G 230-400/50/3N
- 1140838 Vacuum packing machine SU-606P 230-400/50/3N
- 1140839 Vacuum packing machine SU-606+ 230-400/50/3N
- 1140840 Vacuum packing machine SU-606P+ 230-400/50/3N
- 1140841 Vacuum packing machine SU-606GP 230-400/50/3N
- 1140842 Vacuum packing machine SU-606G+ 230-400/50/3N
- 1140843 Vacuum packing machine SU-606GP+ 230-400/50/3N
- 1140855 Vacuum packing machine SU-606 208-240/60/3
- 1140856 Vacuum packing machine SU-606 208-240/60/3 -C-
- 1140857 Vacuum packing machine SU-606G 208-240/60/3
- 1140858 Vacuum packing machine SU-606P 208-240/60/3
- 1140859 Vacuum packing machine SU-606+ 208-240/60/3
- 1140860 Vacuum packing machine SU-606P+ 208-240/60/3
- 1140861 Vacuum packing machine SU-606GP 208-240/60/3
- 1140862 Vacuum packing machine SU-606G+ 208-240/60/3
- 1140863 Vacuum packing machine SU-606GP+ 208-240/60/3
- 1140875 Vacuum packing machine SU-606GP 230/50/1
- 1140877 VAC PACK MACH S-600

* Ask for special versions availability

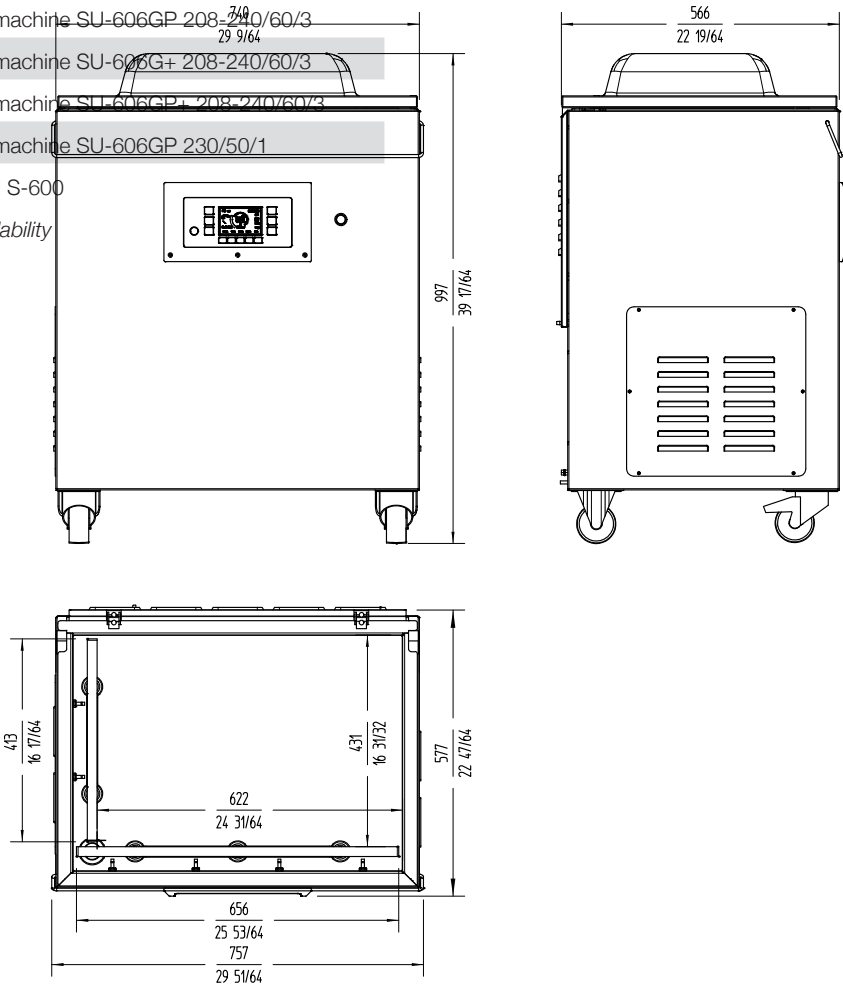

FOOD PRESERVATION AND SOUS-VIDE
VACUUM PACKING MACHINES - "SENSOR ULTRA" LINE

sammic www.sammic.com Food Service Equipment Manufacturer Polígono Basarte, 1. phone +34 943 15 72 36 20720 Azkoitia, Spain sales@sammic.com		Project	Date
		Item	Qty
		Approved	

product sheet
updated 04/03/2022