



# VACUUM SEALER SU-806CC

Floorstanding unit. 63 m<sup>3</sup>/h. 581+581 mm.



## SALES DESCRIPTION

Two sealing bars (581+581 mm.)  
63 m<sup>3</sup>/h Busch vacuum pump.  
Vacuum controlled by sensor.

- ✓ Powered by Busch.
- ✓ Vacuum controlled by sensor.
- ✓ Vacuum PLUS.
- ✓ LCD colour screen: all information at a glance.
- ✓ Backlit touch keyboard.
- ✓ Programmable: 25-programme memory. Blocking option.
- ✓ "Pause" button.
- ✓ Phased vacuum programme.
- ✓ Detection of the evaporation of liquids.
- ✓ Double seal.
- ✓ Cordless sealing bar.
- ✓ Progressive decompression.
- ✓ Vac-Norm ready with Automatic decompression.
- ✓ Stainless steel body and chamber.
- ✓ Damped transparent lid of high durability polycarbonate.
- ✓ Dry-oil programme for drying the pump.
- ✓ Working hours counter for oil changes.
- ✓ Safety system with protection against vacuum failure.
- ✓ NSF-listed.

## INCLUDES

- ✓ BUSCH pump.
- ✓ Sensor Controls.
- ✓ 25 programmable settings.
- ✓ Vacuum PLUS: up to 10 seconds of extra vacuum pull.
- ✓ Soft air function.
- ✓ Clear methacrylate lid.
- ✓ "PAUSE" function.
- ✓ Liquid detection system.
- ✓ Dry oil cycle.
- ✓ NSF Approved.
- ✓ Filling plate.

## OPTIONAL

- Inert gas
- Printer
- Bluetooth connectivity
- Vacuum packing bags
- External vacuum kit for
- Vac-Norm, containers and accessories
- Bag cutting kit
- Support for liquid packaging
- Additional filling plates

## ACCESSORIES

- Bag cutting kits
- Filling plates
- Liquid insert plates
- Vac-norm external vacuum kits
- Vac-norm containers
- Smooth bags for vacuum
- packing
- Thermal labels for CG2 / RB printer
- RB Desktop printer for SU vacuum packing machines
- Thermal transfer labels for RB printer

## SPECIFICATIONS

Pump capacity: 63 m<sup>3</sup>/h  
Pump capacity (60 Hz): 75 m<sup>3</sup>/h  
Bar length: 581 mm + 581 mm  
Total loading: 1500 W  
Vacuum pressure (maximum): 0.5 mbar

Plug: --  
Electrical connection: --

### Internal dimensions

- ✓ Width: 864 mm
- ✓ Depth: 603 mm
- ✓ Height: 215 mm

### External dimensions (WxDxH)

- ✓ Width: 960 mm
- ✓ Depth: 757 mm
- ✓ Height: 998 mm

Net weight: 232 Kg

Noise level (1m.): 75 dB(A)  
Background noise: 32 dB(A)

### Crated dimensions

840 x 1060 x 1200 mm  
Gross weight: 257 Kg

FOOD PRESERVATION AND SOUS-VIDE  
VACUUM PACKING MACHINES - "SENSOR ULTRA" LINE

product sheet  
updated 04/03/2022



SAMMIC, S.L.  
Bassaré, 1 - 20720 Azzovita  
www.sammic.com



# VACUUM SEALER SU-806CC


Floorstanding unit. 63 m<sup>3</sup>/h. 581+581 mm.



## AVAILABLE MODELS

- 1140887 Vacuum packing machine SU-806 CC 230-400/50/3N
- 1140888 Vacuum packing machine SU-806 CC 230-400/50/3N -C-
- 1140889 Vacuum packing machine SU-806G CC 230-400/50/3N
- 1140890 Vacuum packing machine SU-806P CC 230-400/50/3N
- 1140891 Vacuum packing machine SU-806GP CC 230-400/50/3N
- 1140905 Vacuum packing machine SU-806 CC 208-240/60/3
- 1140906 Vacuum packing machine SU-806 CC 208-240/60/3 -C-
- 1140907 Vacuum packing machine SU-806G CC 208-240/60/3
- 1140908 Vacuum packing machine SU-806P CC 208-240/60/3
- 1140909 Vacuum packing machine SU-806GP CC 208-240/60/3
- 1140923 Vacuum packing machine SU-806 CC 220/60/3
- 1140924 Vacuum packing machine SU-806 CC 220/60/3 -C-
- 1140925 Vacuum packing machine SU-806G CC 220/60/3
- 1140926 Vacuum packing machine SU-806P CC 220/60/3
- 1140927 Vacuum packing machine SU-806GP CC 220/60/3
- 1140886 Vacuum packing machine SU-806GP CC 230-400/50/3N  
C
- 1140892 Vacuum packing machine SU-806G CC 230-400/60/3N  
-C-

\* Ask for special versions availability

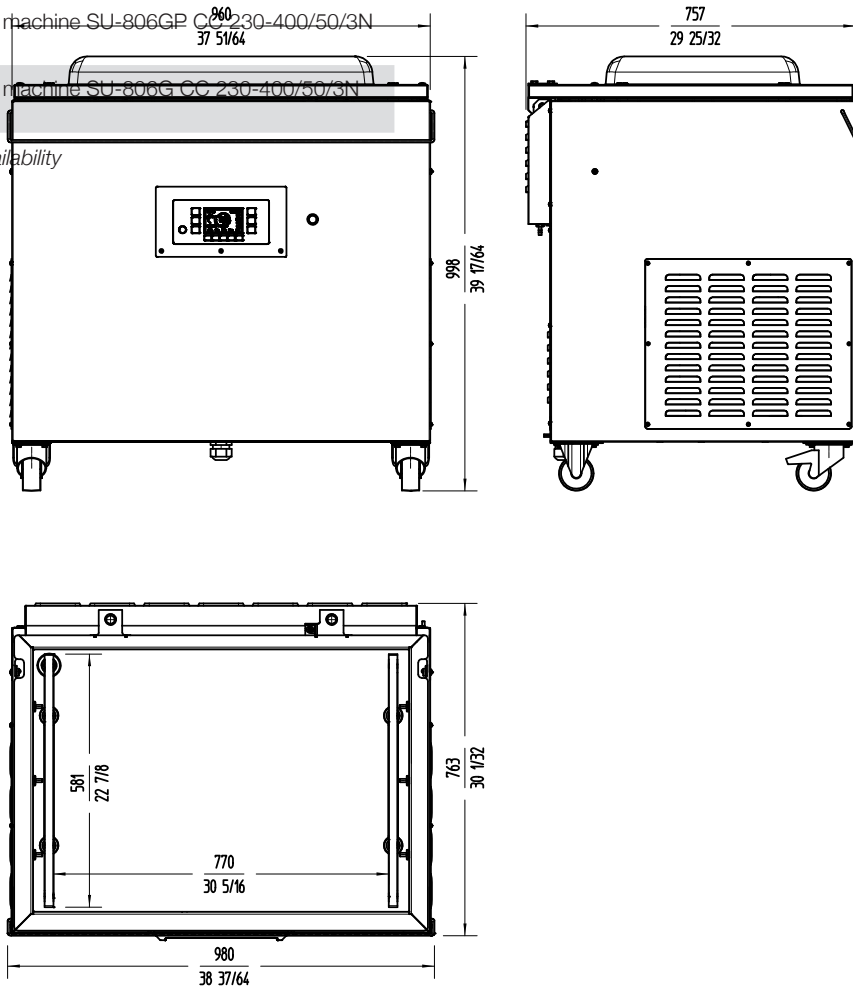

FOOD PRESERVATION AND SOUS-VIDE  
VACUUM PACKING MACHINES - "SENSOR ULTRA" LINE

**sammic** | www.sammic.com  
Food Service Equipment Manufacturer

Polígono Basarte, 1. phone +34 943 15 72 36  
20720 Azkoitia, Spain sales@sammic.com



Project	Date
Item	Qty
Approved	

product sheet  
updated 04/03/2022