


# AF 80 *XSafe*

## Self Contained Ice Machine 70 kg

Item #:

Project:

Quantity:

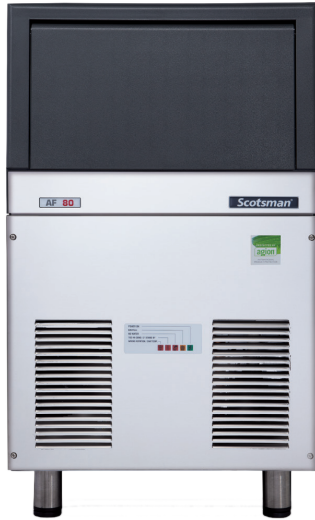

### FEATURES

- Produces granular shape ice flakes, 75% hardness
- Electronically controlled operation, with self-diagnostic functions with external alarm lights providing operational information for early alert and fast diagnosis of operating issues
- External Components constructed from corrosion-resistant stainless steel crafted for optimal aesthetic appeal through superior fit and finish
- Ergonomically convenient, slanted & disappearing storage bin door
- Front access for easier maintenance
- Front-in, front-out airflow allows for built-in installations
- Also available as AF80 LAB: specifically designed to be used with demineralized and distilled water. Already fitted with Shuko plug.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



AF 80  
Flake ice  
Residual water content 25%

### CONDENSING SYSTEM

Air cooled  
Water cooled

### REFRIGERANT GAS

R134a

### VOLTAGE V/Hz/ph

230/50/1  
230/60/1

### INTERNAL BIN CAPACITY

25 kg

### CERTIFICATIONS



### OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

**IMPORTANT NOTICE:**  
Models and specifications are subject to change without notice.  
This spec sheet is meant for commercial purpose only.  
For technical documentation please refer to our service manuals.

[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)


Self Contained Ice Machine 70 kg

# AF 80 *XSafe*

## Self Contained Ice Machine 70 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine 70 kg

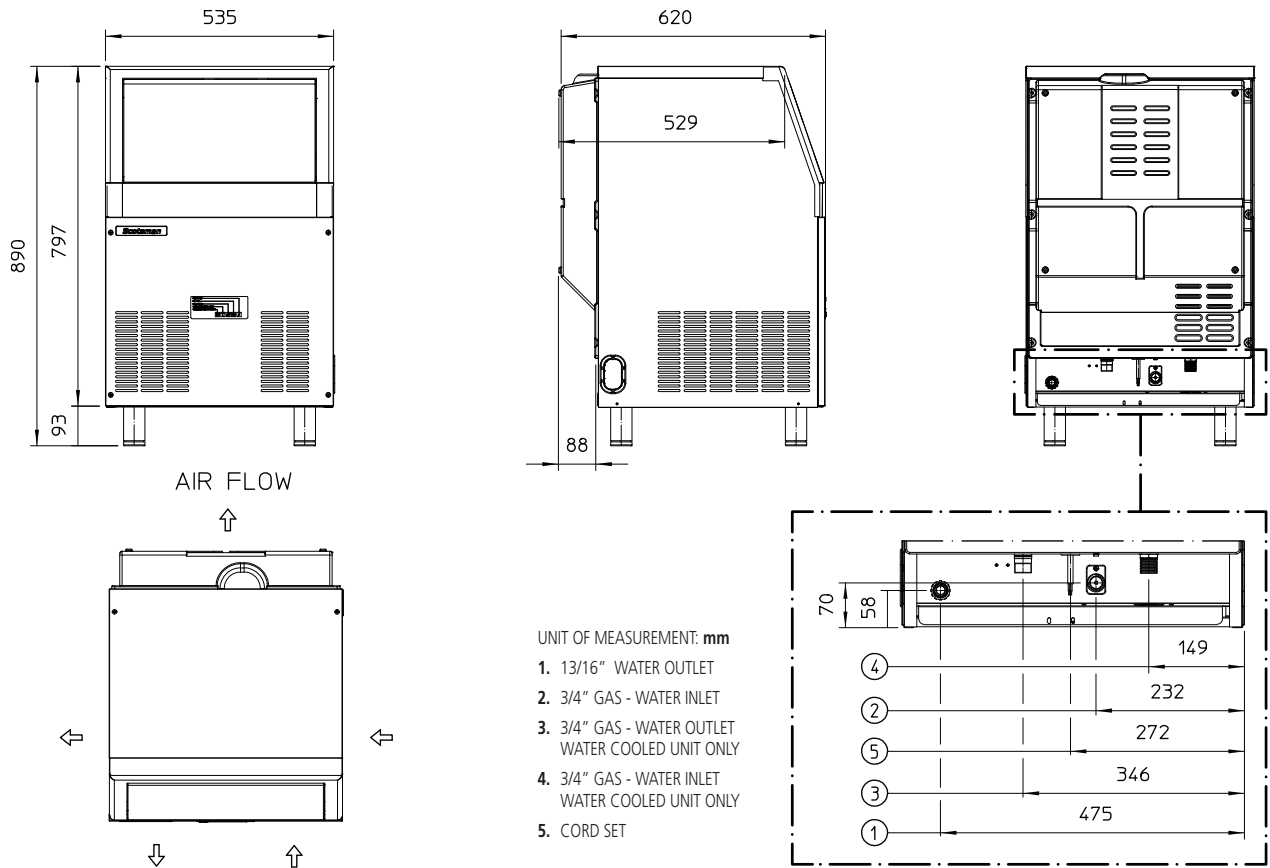

UNIT DATA		SHIPPING DATA										
Size (W x D x H)	535 x 620 x 890 mm	Carton (W x D x H)	600 x 690 x 980 mm									
Net weight	50 kg	Weight	58 kg									
Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size	
		10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A	
AF 80 AS	230/50/1	70	67	53	13.0	6.9	2.2	340	790	3 x 1.5	10	
AF 80 WS	230/50/1	73	66	56	12.5	7.0	17.1	300	780	3 x 1.5	10	
AF 80 AS	230/60/1	70	67	53	13.0	6.9	2.2	340	900	3 x 1.5	10	
AF 80 WS	230/60/1	73	66	56	12.5	7.0	17.1	300	900	3 x 1.5	10	

(\*) Data refer to 32°C Amb. / 21°C Water temperature conditions