

ENOTEC 340 (3TV)



ENOTEC 340 (1TV-P)



	°C	mm. (LxPxH)	Lt.	<b>DI SERIE</b>	Watt	% U.R.	DEFROST				0,75 lt.	Kg.		
Enotec 340 (1TV)	+5/+18	595x711x1810	340	n° 3 mm. 450x526	600	65		230v/1/50Hz		R404a	n° 90 Ø 75 mm.	112	Optional	LED di serie
Enotec 340 (3TV)	+5/+9/+18	595x711x1810	340	n° 3 mm. 450x526	600	65		230v/1/50Hz		R404a	n° 90 Ø 75 mm.	112	Optional	LED di serie
Enotec 340 (1TV-P)	+5/+18	595x711x1810	340	n° 3 mm. 470x526	600	65		230v/1/50Hz		R404a	n° 90 Ø 75 mm.	112	Optional	LED di serie

Dati di collaudo • Test details • Détails d'essai • Prüfungsergebnisse • Datos de ensayo • MAX = (30°C - % U.R. 55)



Prezzi vedi LISTINO a pagina 50  
See PRICE LIST on page 50

ENOTEC 340 (1TV)



**Cod. 01**

Colore Optional / Optional colour / Couleur Optionnel / Extrafarbe  
Color extras



**Cod. 02**

Colore Optional / Optional colour / Couleur Optionnel / Extrafarbe  
Color extras



Printatura colori legno standard  
Standard decoration wood colors



COD. 04

COD. 05

RAL

Colori optional  
Optional colors





COD. 02

COD. 01





ENOTEC 340

Mono & Multi °C

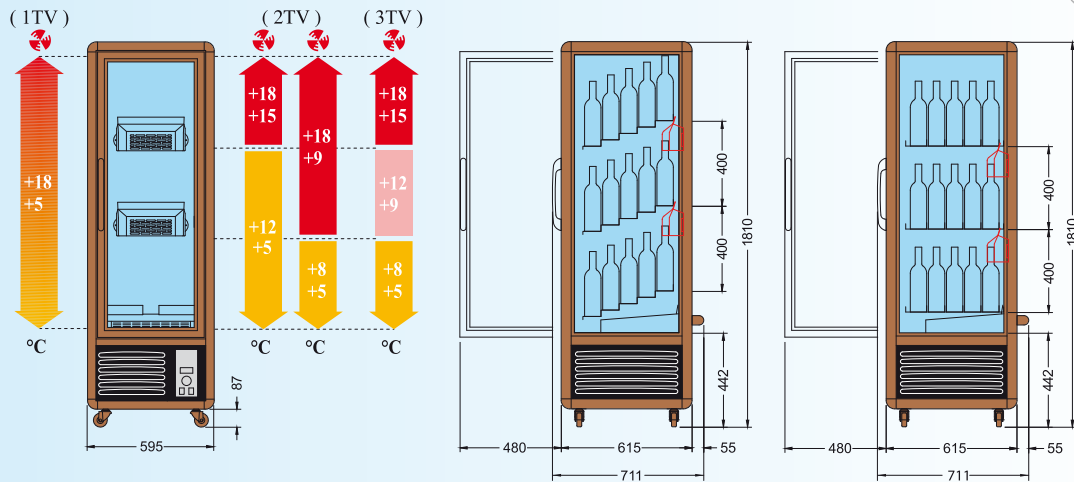

ENOTEC 680

Mono & Multi °C

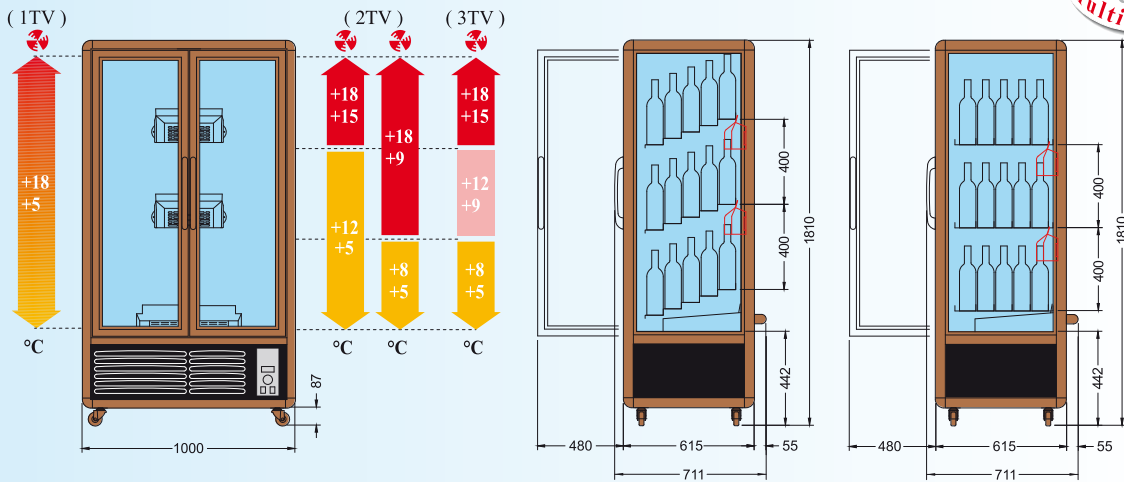

ENOPRESTIGE 400 (4TV • 1TV)

Mono & Multi °C

