



GENERAL FEATURES

- S/S Rack **56.5x69 cm**
- Total weight: 211 Kg.
- Washing cycles / racks/hour: 2'-3'-6'-9' / 30-20-10-7
- 3-way s/s upper and lower rotating wash arms
- Independent rotating upper and lower rinse arms
- Wash pump: 1.5 kW vertical self-cleaning
- Boiler capacity: 11 lt
- Tank capacity: 65 lt
- Boiler heating element: 6 kW
- Tank heating element: 6 kW
- Water quantity per cycle: 3,5 lt
- Electronic controls
- Display for boiler and tank water temperatures
- Useful washing height: 650 mm
- Door microswitch
- Automatic filling of water, direct into the tank
- Hot rinse
- Rinse booster pump
- Break Tank
- Atmospheric boiler
- Heat recovery system
- Thermostop function
- Automatic end-of-day self-cleaning cycle of washing tank

WATER FILTRATION

- Pre-filtering of tank water made of no.1 s/s mesh basket filter
- S/S inle wash pump filter, easily removable

BODY

- Body in stainless steel
- Double skinned body and door, insulated
- S/S door handle
- Preformed wash tank in s/s AISI 316
- S/S removable upper and lower wash/rinse arms for easy cleaning
- Boiler in s/s AISI 316

EQUIPMENT

- 1 s/s rack on wheels 56.5x69 cm
- 1 water inlet hose (1,5 mt length)
- 1 water drain hose (2 mt length)

OPTIONALS

- Electric detergent dispenser
- Electric rinse-aid dispenser
- Drain pump
- 60 Hz version

ACCESSORIES FOR WATER TREATMENT

- Water softener unit – external fitting

ACCESSORIES

- S/S special racks for trays

INSTALLATION

- Level the machine acting on the adjustable feet

ELECTRIC CONNECTION

- The mains voltage must be the one indicated on the serial no. label
- The machine must be connected to a suitable earthing system
- Connect the power plug to a suitable omnipolar wall switch


WATER CONNECTION

- Connect a water softener in case of hard water
- The water pressure must be between 0.1MPa (1 bar) and 5MPa (5bar).
- The water temperature must be between 10 and 50°C


TECHNICAL SPECIFICATIONS

- Voltage: **380-415 V3N / 220-240V3~ 50Hz**
- Total power : **7.5 kW**
- Amperage: **13 A / 20 A**
- Power cord supply size. : **5 x 4 mmq**

AU 55-65 E ES

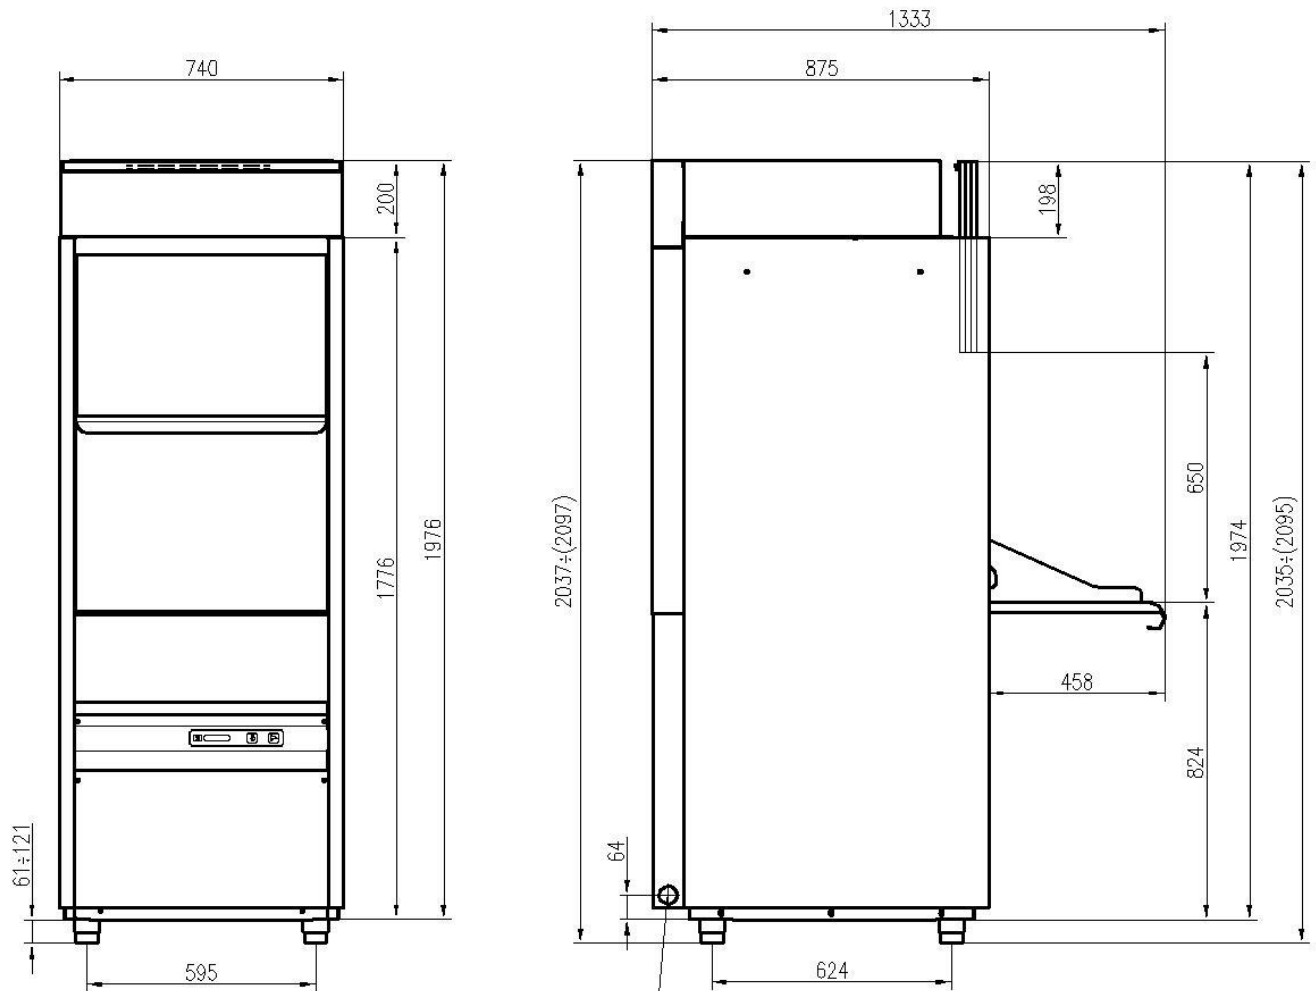

USCITA CAVO DI ALIMENTAZIONE
 OUVERTURE DE PASSAGE CABLE D'ALIMENTATION
 EXIT POWER CORD SUPPLY

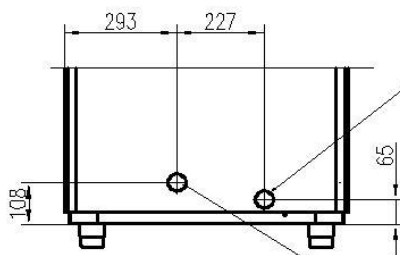

VISTA POSTERIORE
 VUE ARRIERE
 REAR OF MACHINE

TUBO DI SCARICO \varnothing INT. mm.28 LUNGHEZZA mm.2000
 OUVERTURE DE PASSAGE TUYAU DE VIDANGE \varnothing INT. 28 mm. L=mm.2000.
 EXIT WATER OUTLET PIPE INT. \varnothing 28 mm. L=mm.2000.

CANNA DI CARICO CON ATTACCO G 3/4" LUNGHEZZA mm.1500.
 OUVERTURE DE PASSAGE TUYAU D'ALIMENTATION EAU AVEC CONNEXION G 3/4" L=mm 1500.
 WATER INLET PIPE CONNECTION G 3/4" L=mm 1500.

	Min 10°C-MAX 50°C Min 10°C-MAX 25°C with ENERGY RECOVERY
	200±500kPa(2±5 Bar) 100±500kPa(1±5 Bar) with ATMOSPHERIC BOILER
	HARDNESS 5±20f-2.8±11'd