

Modular Ice Machine 500 kg

Item #:
Project:
Quantity:



FEATURES

- Top Materials: AISI 304 Stainless steel and new removable grid
- Core Ice System: Stable evaporator system (Axial load).
- New Core Evaporator: Highly balanced auger (double fly system).
- New Gearmotor: Evaporator stability improved and noise free.
- Innovative Ice Breaker: Very dry flake ice - 12% of water contents.
- Durable Operations: High efficiency and better performance.
- Easy to Clean: Facilitated cleaning process and XSafe standard.
- New High-tech Water Sump with easy regulation system.
- New ice level sensor: for seamless operations.
- New Display: Touch & Smart.
- XWave: New App with improved electronics and programming.



MXF 1027
Superflake ice
Residual water content 12%

CONDENSING SYSTEM

Air cooled

REFRIGERANT GAS

R290

VOLTAGE V/Hz/ph

230/50/1

RECOMMENDED BINS

Head	Bins	kg
MXF 1027	SB530	243



CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.


www.scotsman-ice.it
www.scotsman-ice.com

Modular Ice Machine 500 kg

Modular Ice Machine 500 kg

Item #:
Project:
Quantity:

Modular Ice Machine 500 kg

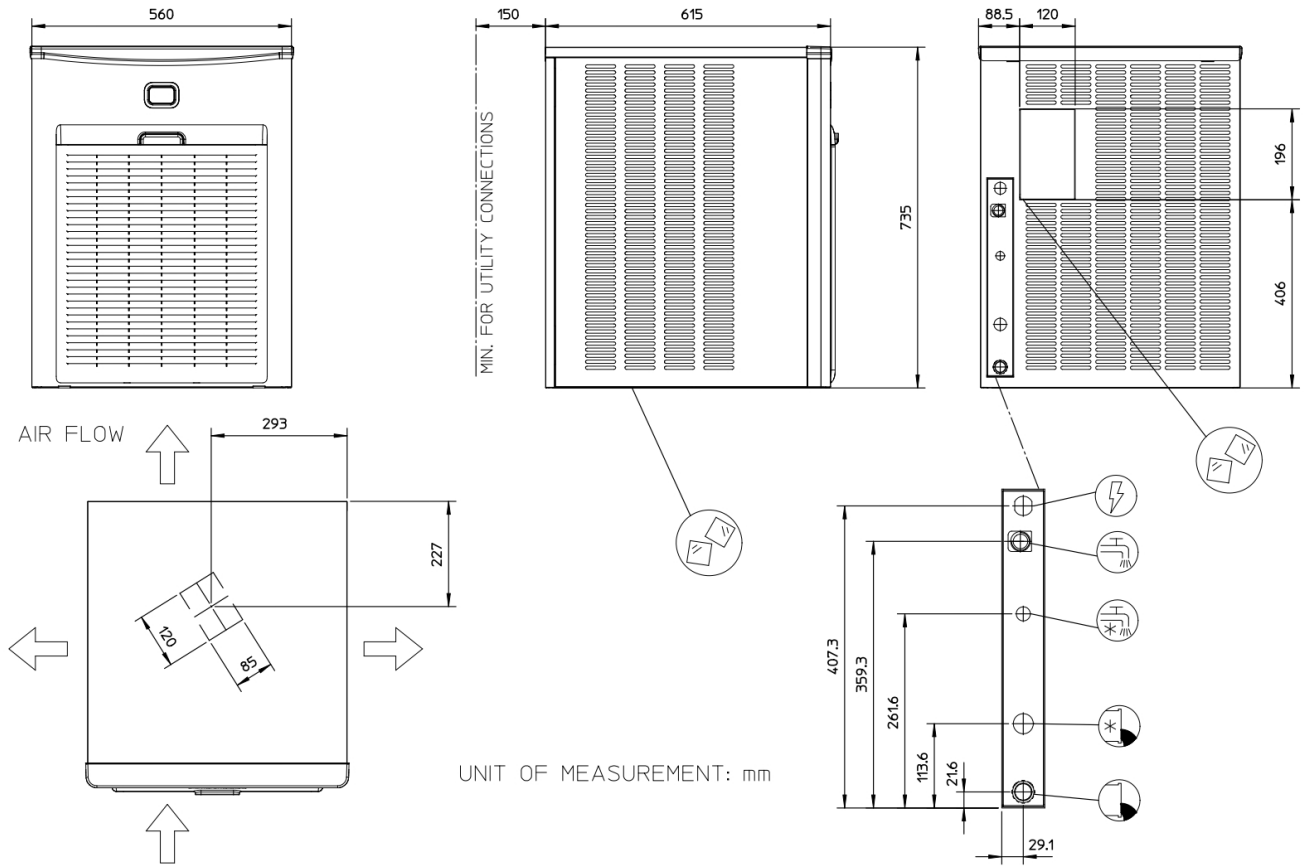

UNIT OF MEASUREMENT: mm

UNIT DATA		SHIPPING DATA									
Size (W x D x H)	560 x 735 x 615 mm	Carton (W x D x H)	625 x 910 x 690 mm								
Net weight	80 kg	Weight	90 kg								
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W	W	No. x Ømm²	A
MXF 1027 AS OX	230/50/1	500	430	314	11.3	35.5	13.1	1570	1500	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions