

Self Contained Ice Machine up to 50 Kg



Routine Maintenance Alarm



Front ON-OFF Switch



New stainless steel legs

Proximity condenser air filter



Patented anti-Scale system



Features

- Produces individual Gourmet crystal clear supercubes
- Up to 50 kg (110 lb) daily ice cubes production
- Up to 23 kg (50 lb) ice storage capacity
- Resistant stainless steel exterior
- Simple and reliable electromechanic controls
- Front panel in & out airflow (air-cooled model only) for built-in installation
- Front access condenser air filter, removable and washable (air cooled version only)
- Easily accessible front panel mount ON-OFF Switch
- Routine Maintenance visible alarm light on front panel
- Ergonomically designed ice-storage access, with disappearing door
- Door-closing movement dampening system
- Vapor-based microbial control system pouch in ice-storage area
- Water system protected by patented anti-scale system
- AgION antimicrobial agent embedded in moulded plastics parts
- CFC-free R-134a Refrigerant
- 3 years manufacturer warranty

AC 106 Technologies



Model	Compressor	10°: 10°C			21°: 15°C			23°: 15°C			Dimensions [WxDxH mm]
		[kg]	[lb]	N°	[kg]	[lb]	N°	[kg]	[lb]	N°	
ACM 106 AS		50	110	2500	46	101	2300	23	50	1150	530x600x840/930
ACM 106 WS		50	110	2500	46	101	2300	23	50	1150	[WxDxH inches] 20"x23"x33"/37"
ACL 106 AS		50	110	1280	46	101	1180	23	50	590	

*Estimate number of small, medium or large size gourmet cubes.

[V/Hz/ph] 230/50/1

R 134a

Medium Gourmet
20 g



Ø 29 x H 34 mm

Large Gourmet
39 g



Ø 38 x H 41 mm

This product qualifies for the following listings:



3 Years Warranty


Subject to certain limitations and exclusions

Certified ISO 9001:2008

www.scotsman-ice.it
www.scotsman-ice.com

Models and specifications are subject to change without notice.

Self Contained Ice Machine up to 50 Kg

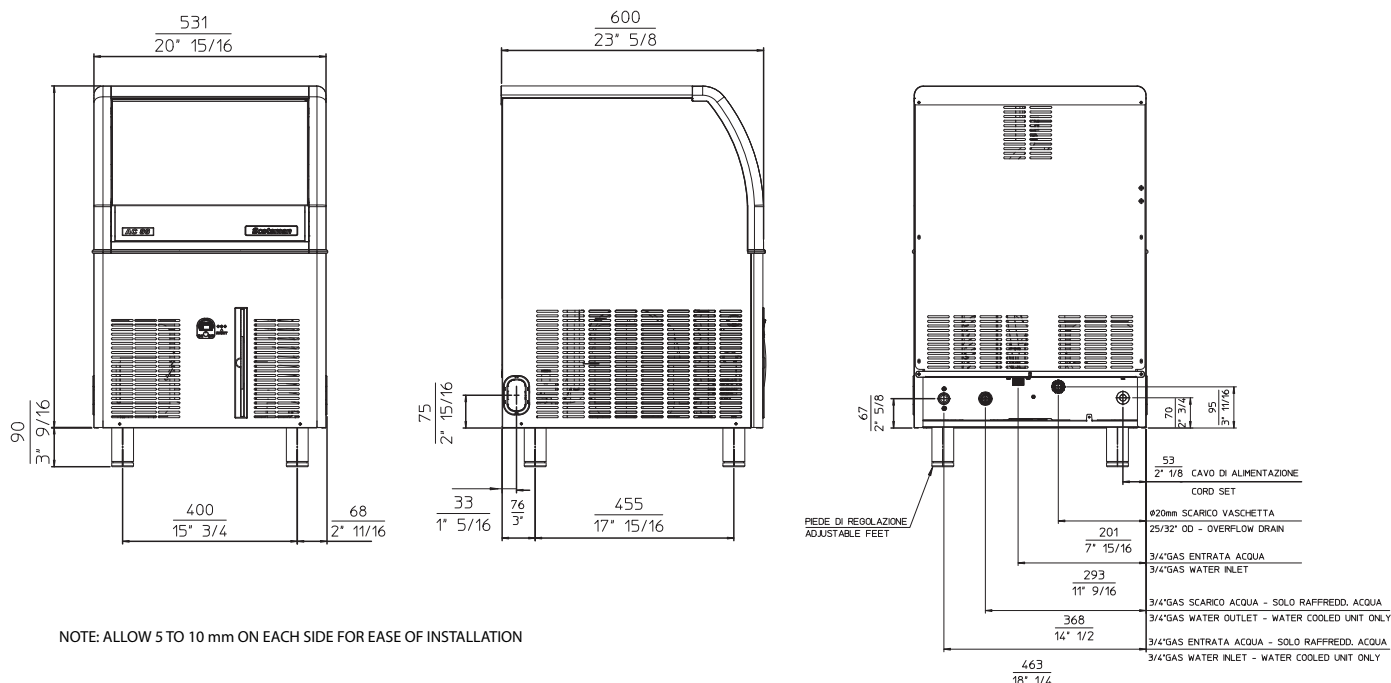

NOTE: ALLOW 5 TO 10 mm ON EACH SIDE FOR EASE OF INSTALLATION

AC 106 AIR COOLED

T _{amb} °C / °F	T _{ref} °C / °F				kg	lb
	50° / 10°	60° / 15°	70° / 21°	90° / 32°		
10°	50	48.5	47	44	kg	lb
50°	110	107	103.5	97	lb	kg
21°	47.5	46	44.5	41.5	kg	lb
70°	105	101	98	91.5	lb	kg
32°	41	39.5	38	35	kg	lb
90°	90.5	87	84	77	lb	kg
38°	38	36.5	35	32	kg	lb
100	84	80.5	77	70.5	lb	kg

AC 106 WATER COOLED

T _{amb} °C / °F	T _{ref} °C / °F				kg	lb
	50° / 10°	60° / 15°	70° / 21°	90° / 32°		
10°	50	48.5	47	44	kg	lb
50°	110	107	103.5	97	lb	kg
21°	47.5	46	44.5	41.5	kg	lb
70°	105	101	98	91.5	lb	kg
32°	44	42.5	41	38	kg	lb
90°	97	93.5	90.5	84	lb	kg
38°	43	41.5	40	37	kg	lb
100	95	91.5	88	81.5	lb	kg

Minimum	Maximum
10°C (50°F)	43°C (110°F)
5°C (41°F)	38°C (100°F)
-10%	+10%
1 bar 14 psi	5 bar 70 psi

Model	Cooling Type	Capacity [Btu/h] [W]	Ice Size [Ømm ²]	Power [W]	FUSE	Energy [kWh] - 100 Kg	Water [L/h] [gal/h]	Weight [kg] [lbs]
ACM 106 AS	Air Cooled	4100 1200	1,5	550	10	25.8	5.5 1.5	47 103
ACM106 WS	Water Cooled	4100 1200	1,5	550	10	22.7	51.5 13.5	47 103
ACL 106 AS	Air Cooled	4100 1200	1,5	550	10	26.7	4.2 1.1	47 103

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com