

# EC 206 XSafe

## Self Contained Ice Machine 130 kg

Item #:
Project:
Quantity:



### FEATURES

- Produces individual Gourmet crystal clear supercubes.
- Resistant stainless steel exterior.
- Front panel in and out airflow (air cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled model only).
- Easily accessible front ON-OFF switch. Routine maintenance visible alarm light on front panel.
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



EC L 206  
Large Gourmet 39 g  
Ø 38 x H 41 mm



EC M 206  
Medium Gourmet 20 g  
Ø 30 x H 34 mm



EC S 206  
Small Gourmet 8 g  
Ø 21 x H 25 mm

### CONDENSING SYSTEM

Air cooled  
Water cooled

### REFRIGERANT GAS

R404A  
R452A

### VOLTAGE V/Hz/ph

230/50/1  
230/60/1

### INTERNAL BIN CAPACITY

50 kg

### CERTIFICATIONS



### OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

**IMPORTANT NOTICE:**  
Models and specifications are subject to change without notice.  
This spec sheet is meant for commercial purpose only.  
For technical documentation please refer to our service manuals.

[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)


Self Contained Ice Machine 130 kg

# EC 206 XSafe

## Self Contained Ice Machine 130 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine 130 kg

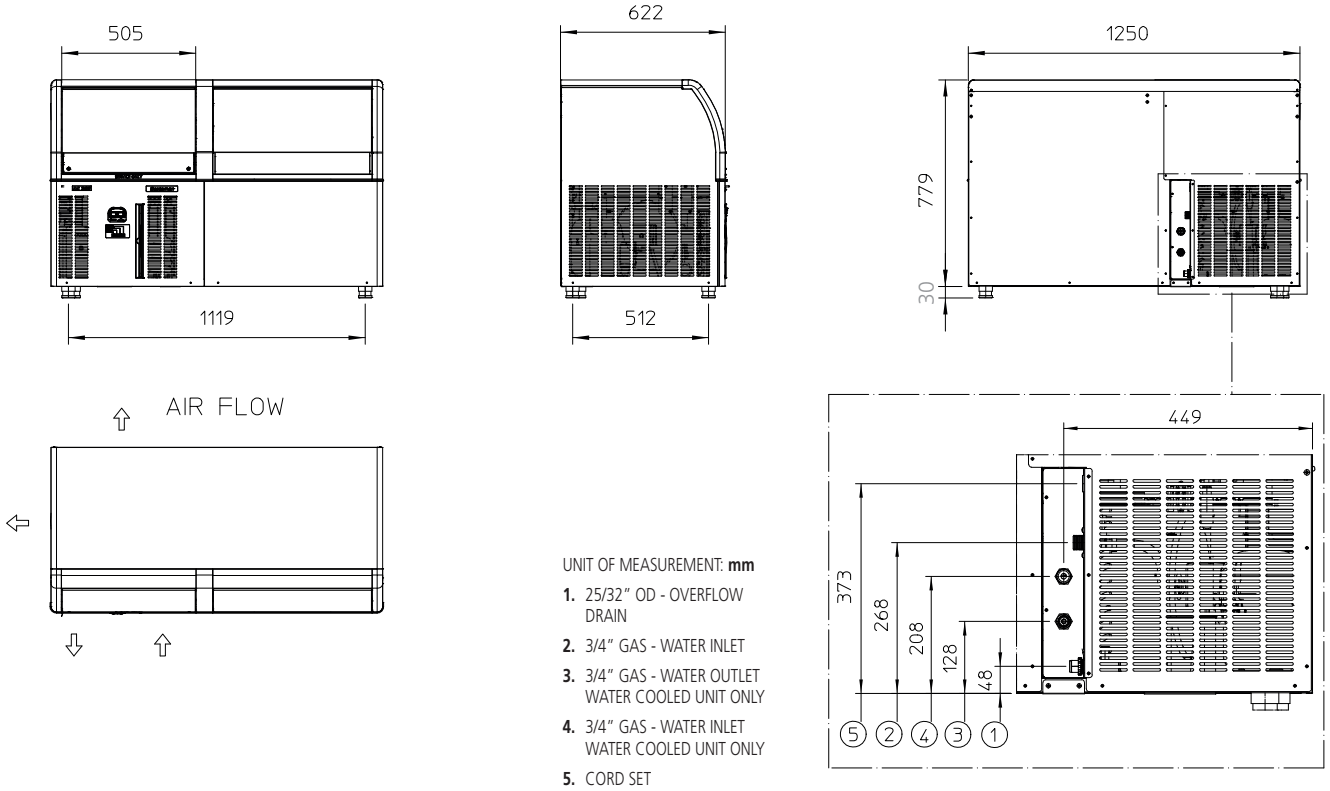

UNIT DATA		SHIPPING DATA									
Size (W x D x H)		1250 x 622 x 809 mm		Carton (W x D x H)		1320 x 690 x 960 mm					
Net weight		84 kg		Weight		97 kg					
Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
		10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm <sup>2</sup>	A
ECL 206 AS	230/50/1	126	117	92	21.6	20.5	9.6	950	2100	3 x 1.5	16
ECM 206 AS	230/50/1	130	123	91	19.9	18.1	10.8	850	1770	3 x 1.5	16
ECM 206 WS	230/50/1	128	126	108	14.9	16.1	81.3	760	1770	3 x 1.5	16
ECS 206 AS	230/50/1	100	93	72	29.8	21.3	7.5	950	2100	3 x 1.5	16
ECM 206 AS	230/60/1	141	136	112	19.6	22.0	12.0	1000	2050	3 x 1.5	16

(\*) Data refer to 32°C Amb. / 21°C Water temperature conditions